



## Sanitary Tabletop Conveyor, Straight Running



### Specifications

Belting:	820 & 821 Series, Low Friction Acetal
Belt Widths:	3 1/4", 4 1/2", 7 1/2", 10", 12"
Frame:	12 ga. 304 stainless steel, No. 4 finish
Frame Width:	Belt width plus 3/4"
Belt Speed:	60 fpm
Bearings:	1 inch, 2 hole precision
Drive Motor:	3/4 hp, 230/460/3/60, TEFC
Drive Shaft:	1" dia. 303 stainless steel
Guide Rail:	Tool-free adjustable, VG-SSR, 1 rail per side. Adjustable to belt width plus 2" to minus 6"
Supports:	1 1/2" square stainless steel tubing
Elevation:	34" to 38" to top of belt
Electrical Controls:	None

### Optional Equipment

#### Drives

- ◆ 1/2 HP, 3/4 HP, 1 HP, 1 1/2 HP
- ◆ Voltage
  - ◆ 110 Volts, 1 phase
  - ◆ 230/460 Volts, 3 phase
  - ◆ 90 Volts DC
- ◆ Duty
  - ◆ TEFC
  - ◆ Wash down
  - ◆ Stainless Steel
  - ◆ Inverter Duty
  - ◆ Explosion proof

#### Electrical Controls

- ◆ Manual Start/Stop Pushbutton Switch
- ◆ Magnetic Starter
- ◆ IEC Starter
- ◆ Variable Frequency Drive
- ◆ DC Speed Controller

#### Supports


- ◆ Locking Swivel Casters

#### Guide Rail

- ◆ 2 rails per side
- ◆ Width spacers

#### Speed

- ◆ Other than 60 fpm

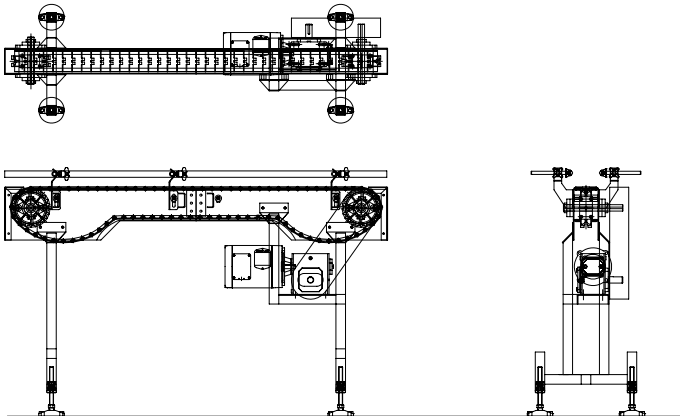

**Quick Ship**

### Pacific Conveyor Systems

1535 E. Edinger Ave. Santa Ana, Ca 92705

Tel: 714-258-1810 Fax: 714-258-2021

e-mail: sales@pacificconveyor.net

www.pacificconveyor.net